


FALLING LIGHT



UNIOY | 21903 · 21904

UNIOY

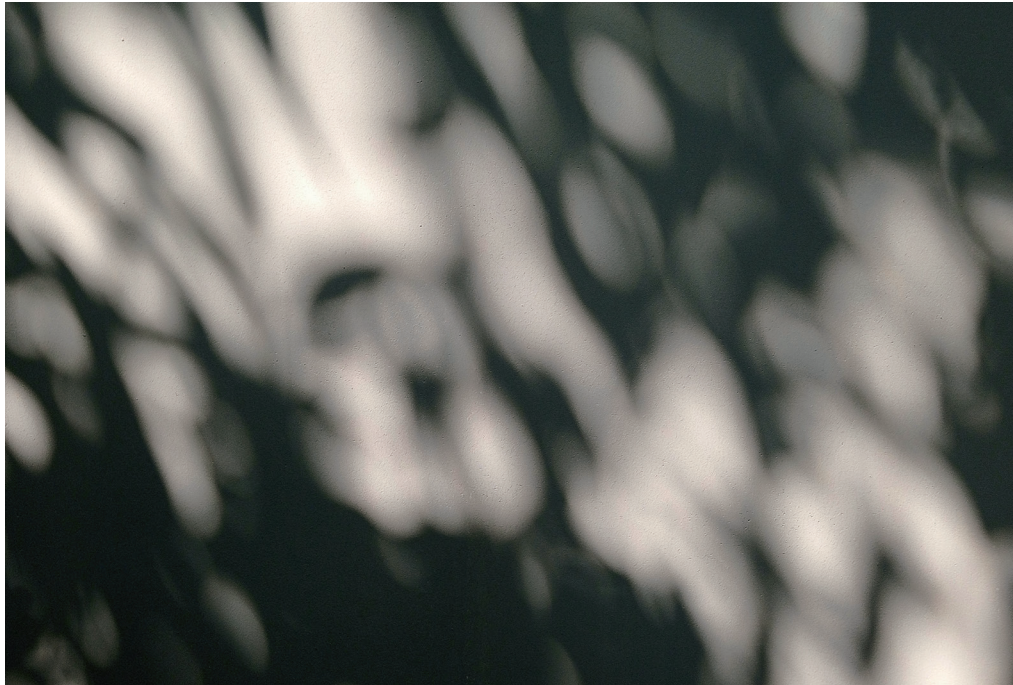


Concept

FALLING LIGHT captures the quiet poetry of natural transition. This series weaves together the serene narrative of Autumn—where leaves rest in warm, layered stillness—with the delicate dance of Sway, where light slips through barriers to cast ever-changing patterns upon the ground.

It is a celebration of ephemeral beauty: the gentle descent of autumn foliage meeting the soft, shifting play of light and shadow. Together, they create floors that feel both grounded and alive—surfaces that tell a story of time, change, and the soft silence between moments.

FALLING LIGHT is designed for contemplative spaces. It brings a nuanced calm to interiors, inviting pause and perception, and turning the floor into a canvas of whispered natural narratives.

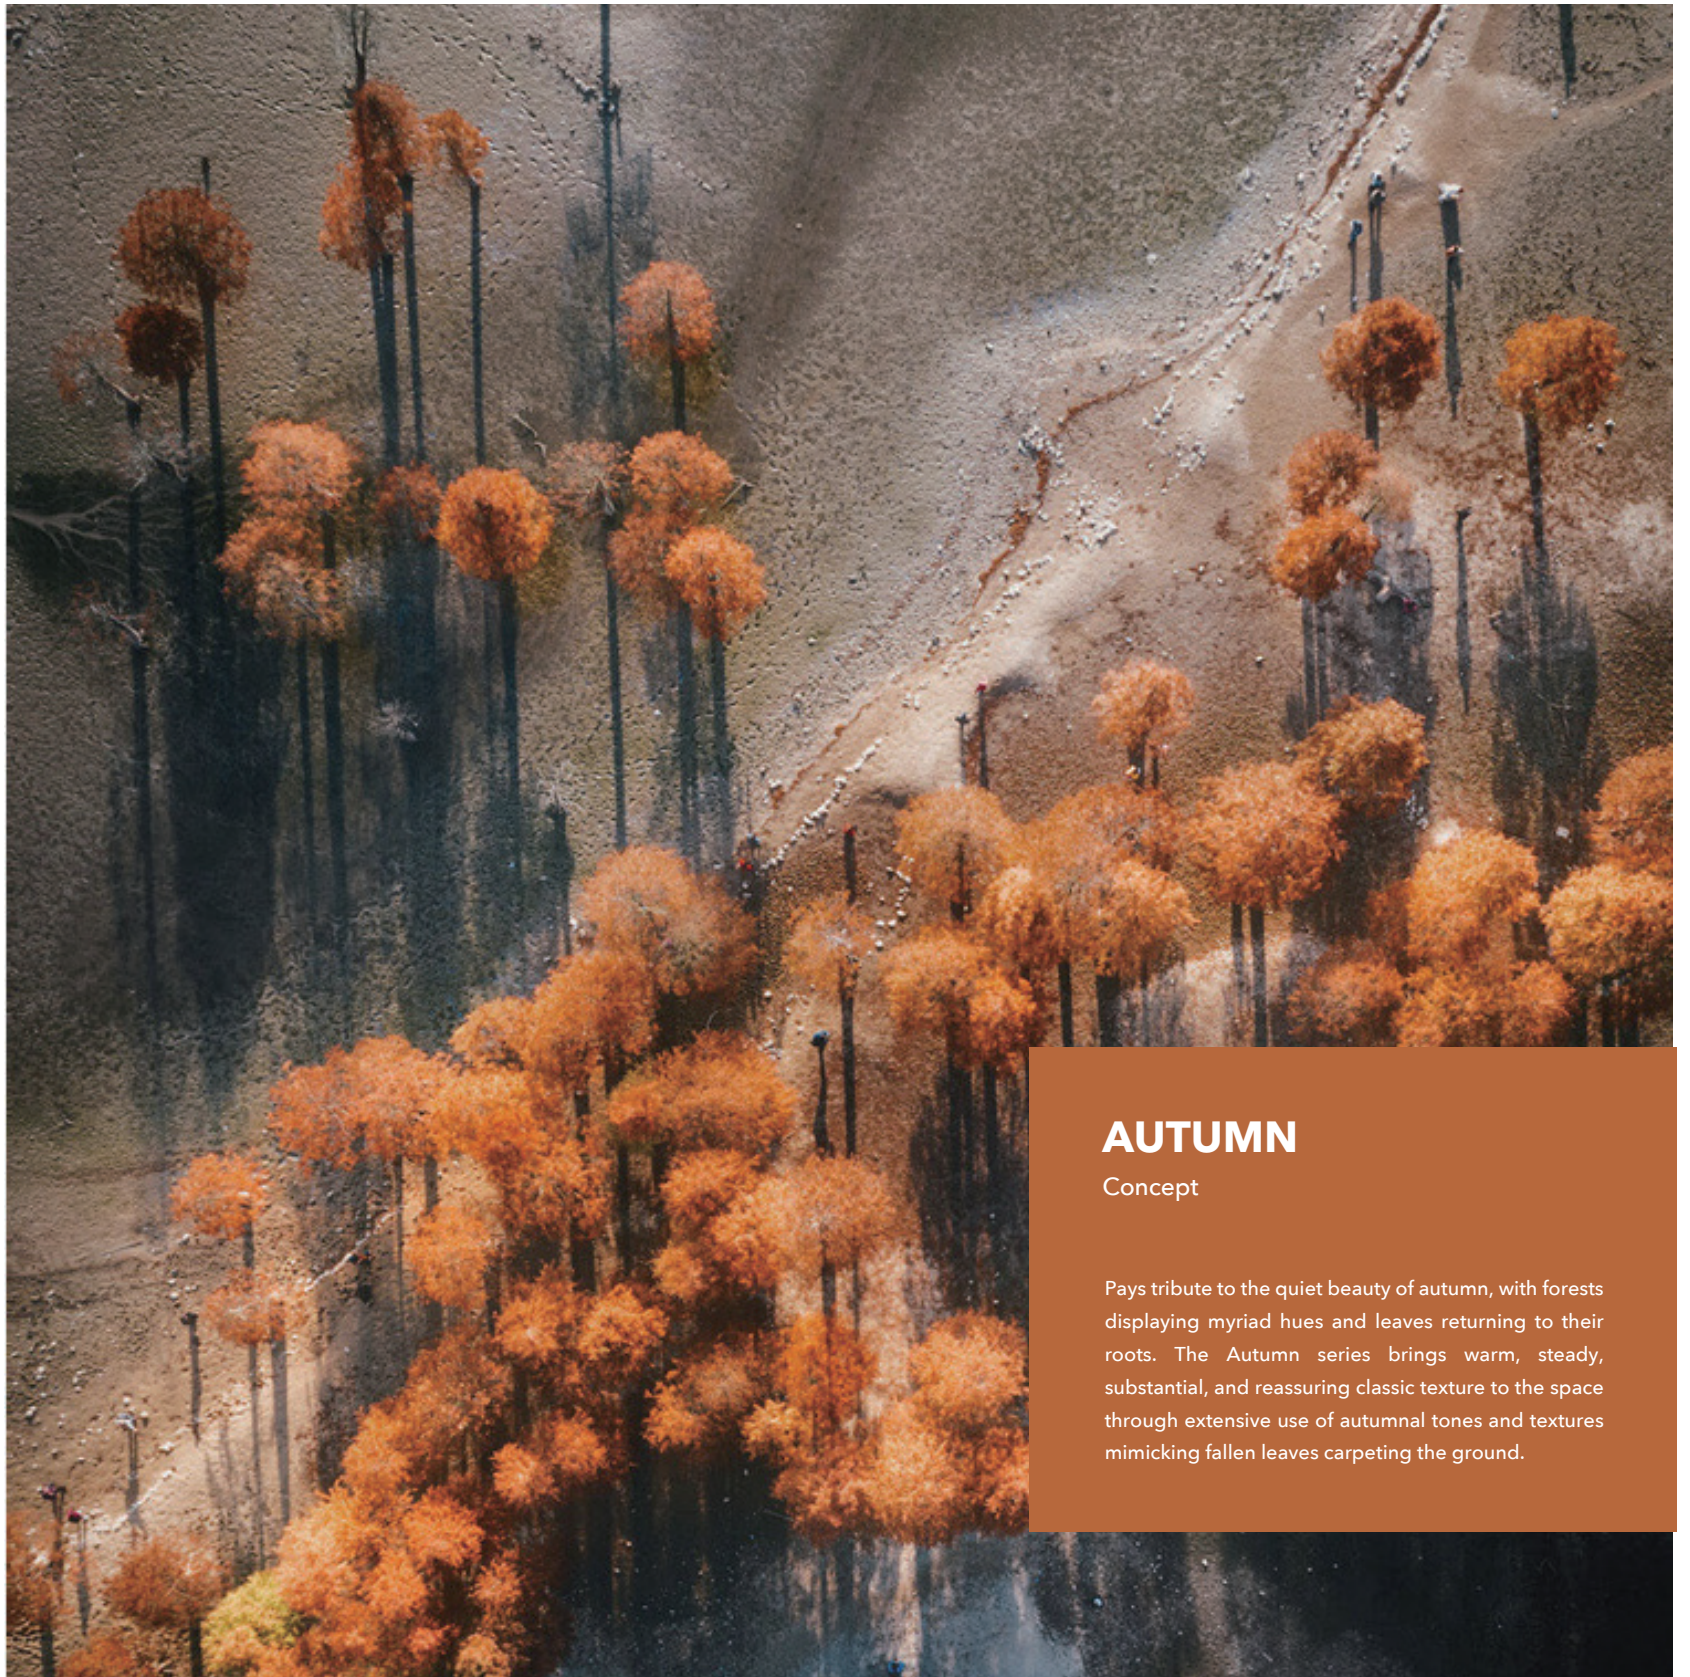

AUTUMN

Concept

Pays tribute to the quiet beauty of autumn, with forests displaying myriad hues and leaves returning to their roots. The Autumn series brings warm, steady, substantial, and reassuring classic texture to the space through extensive use of autumnal tones and textures mimicking fallen leaves carpeting the ground.























SWAY

Concept

Captures the swaying shadows cast on the ground when light passes through grids or foliage. The Sway series recreates the dynamic beauty of dancing light and shadow through interlaced, flowing linear patterns, adding liveliness and rhythm to static spaces, creating a modern, elegant, and ever-changing visual effect.
















Floorscape Inspiration




21903-01



21904-03/13

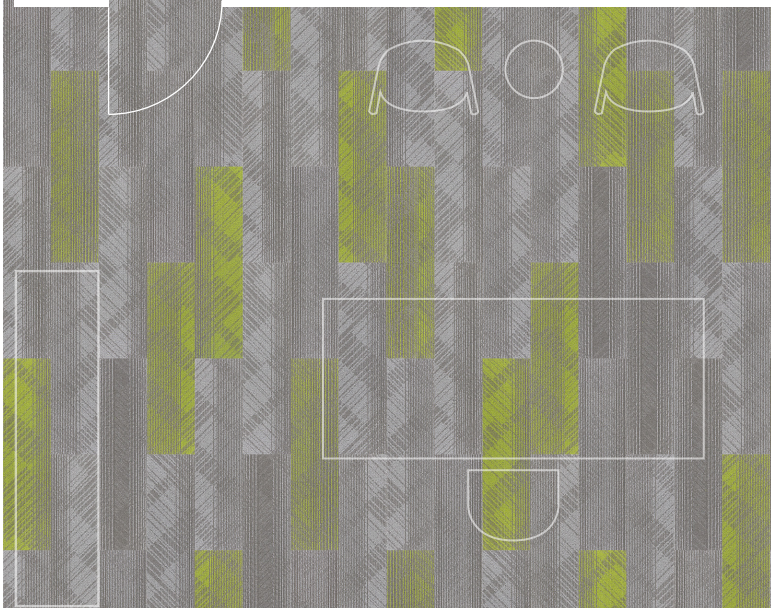

21904-12

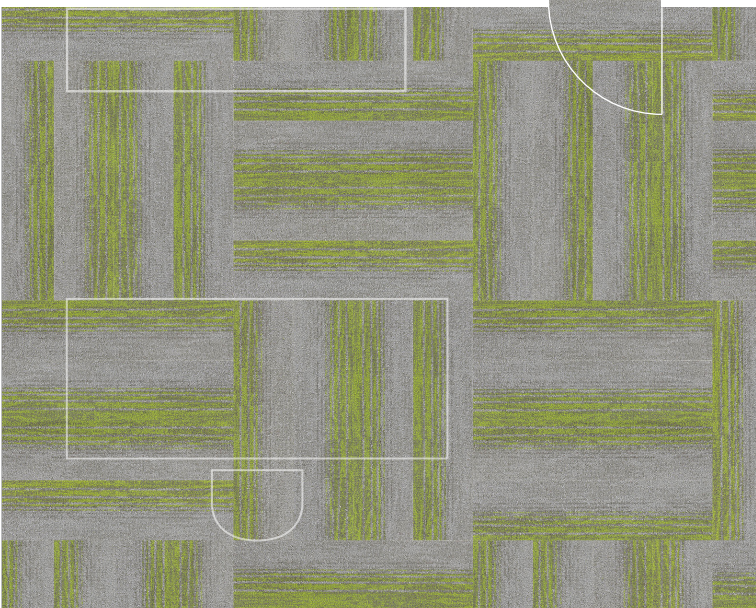

21903-02/12/22

AUTUMN



21903-01



21903-11



21903-21



21903-02



21903-12



21903-22



21903-03




21903-13



21903-23



21903-04



21903-14



21903-24


SWAY




21904-01



21904-02



21904-03



21904-04



21904-11



21904-12



21904-13



21904-14

Specification

Tufted Construction

Fiber

Dye Method

Gauge

Tufted Weight (g/m²)

Tile Size(mm)

Pile Height (mm)

Total Thickness (mm)

Standard Backing

Antibacterial Treatment

Stain-resistant Treatment

Multi-Level loop

PNMIX®

Solution Dyed

1/12

580 ± 5%

250 × 1000

4.0 ± 0.5


6.5 ± 0.5

TGDURA Bac


PureGuard®

CleanShield™


Recommended Installation Methods



Ashlar



Herringbone



Basketweave



Anti-fouling



Anti-static



Environmental



Passed various tests



Fashion colors



100%BCF Yarn



Reduced flammability



Isolation acoustic



Colorfast



Chair roulettes



No edge ravel



Wear resistance



Soil resistance



Wear warranties



Dimensional stability



Long life-span



Easy to transport



Non-moid





UNIQUE,
SO JOYFUL