



INKFLOW

UNIOY | 21905 · 21906

UNIOY



Concept

INKFLOW honors the dual soul of Chinese artistic expression: the disciplined elegance of linearity and the liberated spirit of expressive strokes. This series brings together the refined minimalism of Sketch and the dynamic fluidity of Trace, creating a dialogue between restraint and release, precision and poetic expression.

Here, negative space and brushwork complement each other. Delicate lines define essential forms with precise intention, while colorful brushstrokes unfold freely, revealing rich expressiveness and emotional depth. Together, they transform floors into modern artistic canvases—where simplicity contains vibrant expression, and Eastern aesthetic philosophy merges seamlessly with contemporary spatial sensibility. INKFLOW is designed for environments that value clarity, depth, and meaning. It does not merely fill space—it reveals its essence.



SKETCH

Concept

Originates from the "line-drawing" technique in Chinese painting, which uses lines to define forms. The Sketch series is extremely minimalist, outlining patterns solely with refined, fluid lines, emphasizing negative space and imagination. It represents the "less is more" modern design philosophy, creating a clean, crisp, and artistically evocative minimalist space.














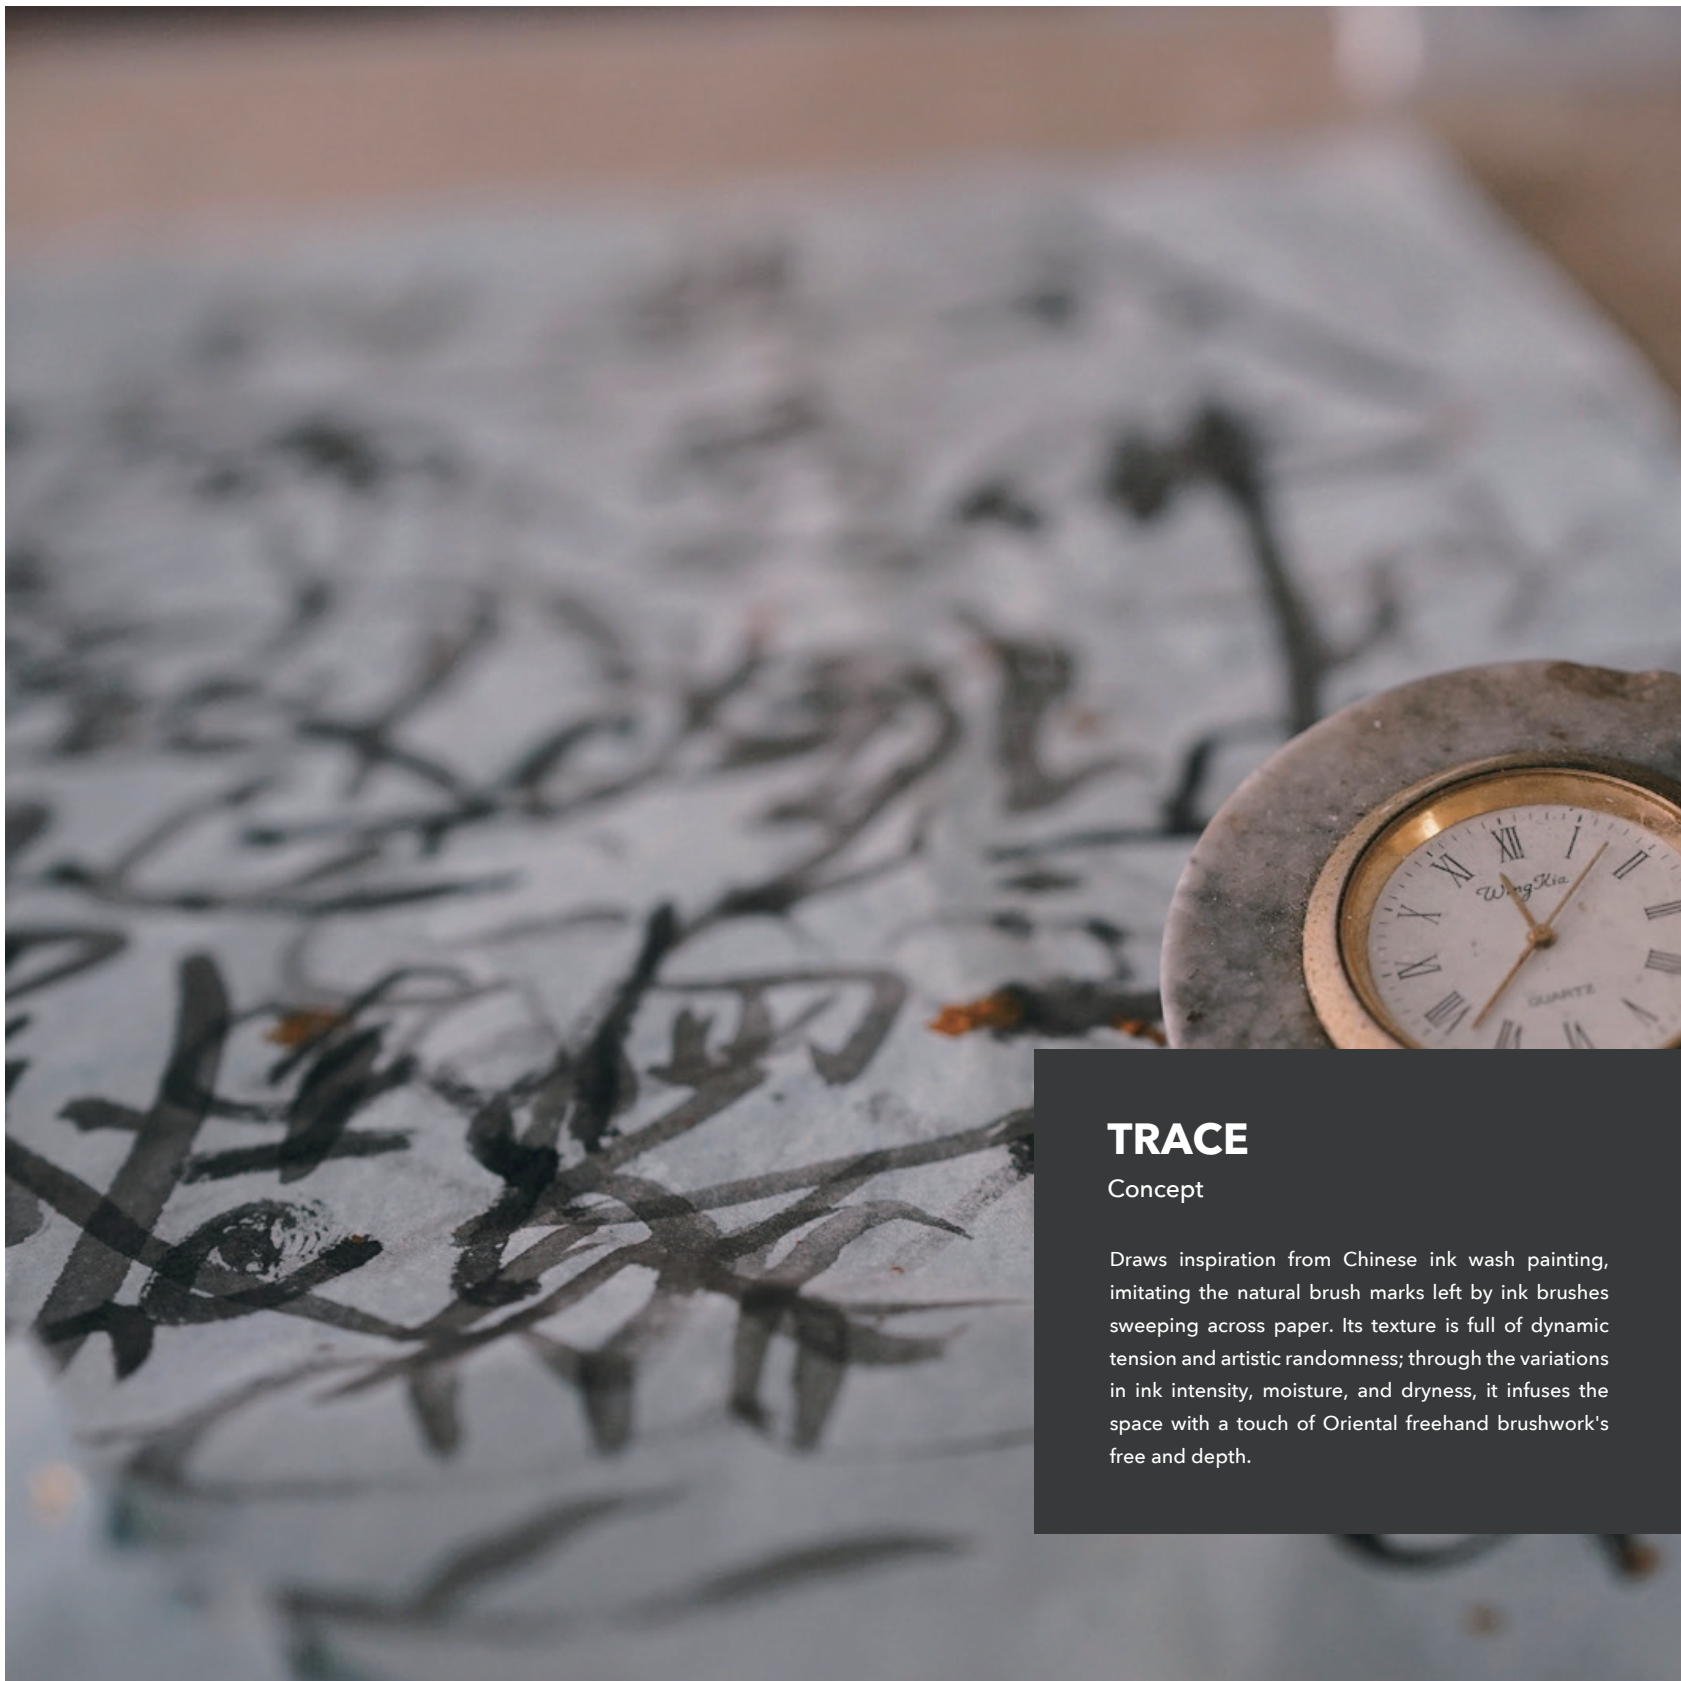

TRACE

Concept

Draws inspiration from Chinese ink wash painting, imitating the natural brush marks left by ink brushes sweeping across paper. Its texture is full of dynamic tension and artistic randomness; through the variations in ink intensity, moisture, and dryness, it infuses the space with a touch of Oriental freehand brushwork's free and depth.





















Floorscape Inspiration

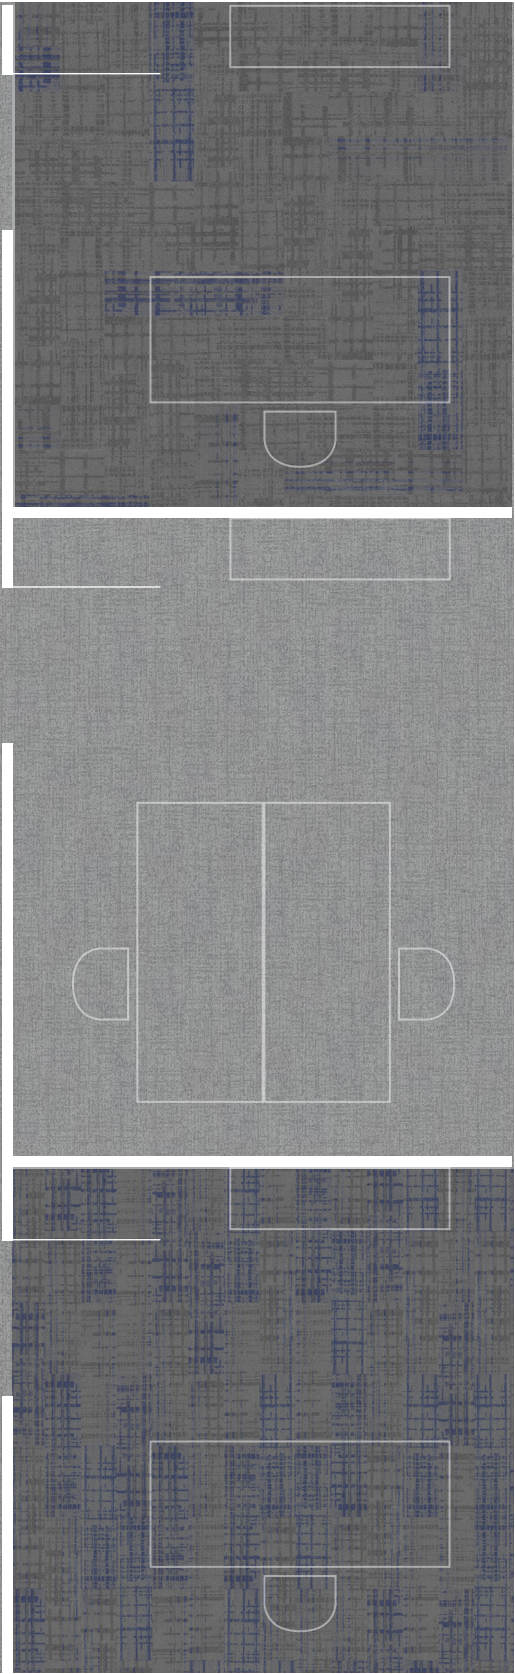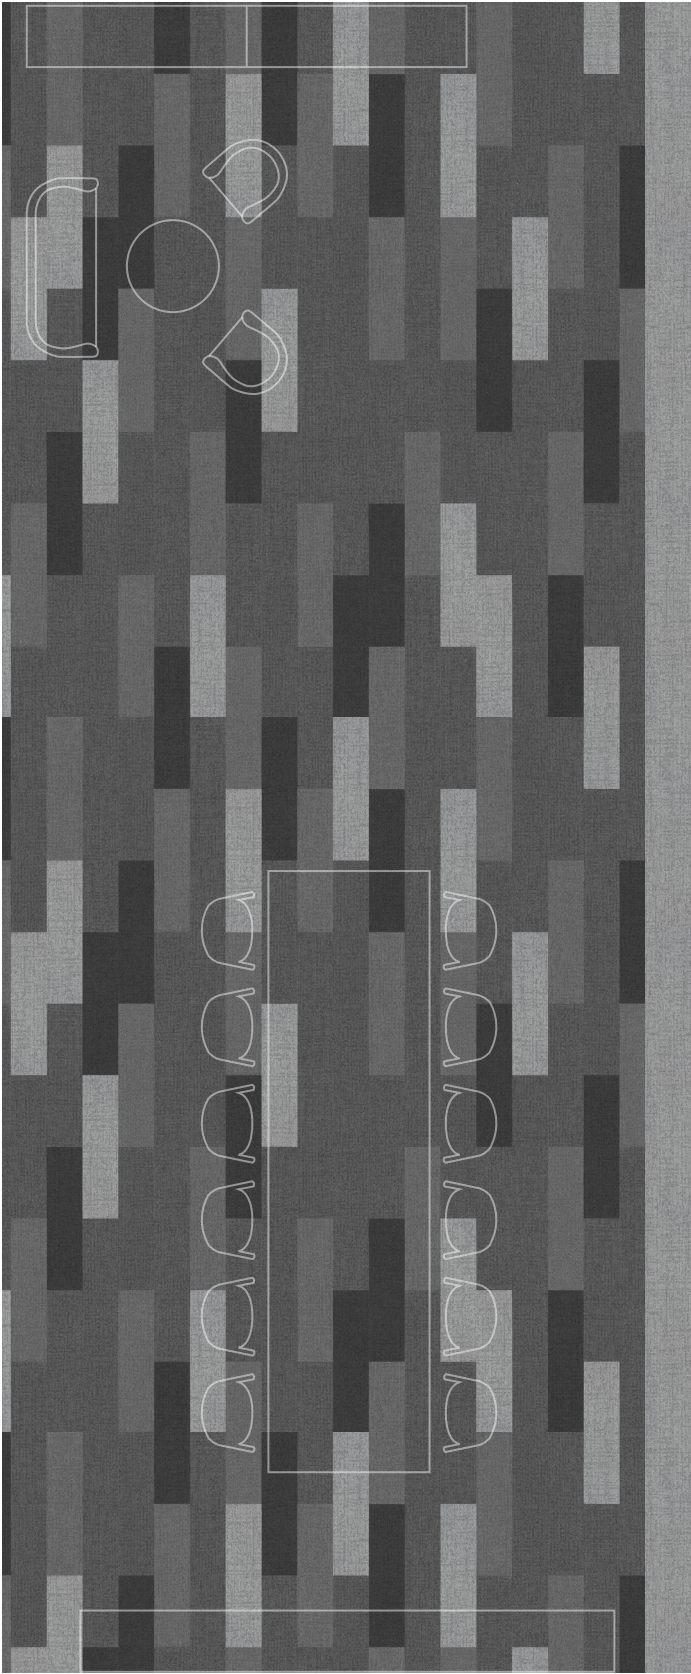

SKETCH

Tufted Weight (g/m²): 610 ± 5 %



21905-01



21905-02



21905-03



21905-04



21905-05

TRACE


Tufted Weight (g/m²): 550 ± 5%




21906-01




21906-02



21906-11



21906-21



21906-12



21906-22



21906-03



21906-04



21906-05

Specifcation

Tufted Construction

Fiber

Dye Method

Gauge

Tile Size(mm)

Pile Height (mm)

Total Thickness (mm)

Standard Backing

Antibacterial Treatment

Stain-resistant Treatment

Multi-level Loop

100% Nylon

Solution Dyed

1/10

250 × 1000

4.0 ± 0.5


6.5 ± 0.5

TGDURA Bac


PureGuard®

CleanShield™


Recommended Installation Methods



Ashlar



Herringbone



Basketweave



Anti-fouling



Anti-static



Environmental



Passed various tests



Fashion colors



100%BCF Yarn



Reduced flammability



Isolation acoustic



Colorfast



Chair roulettes



No edge ravel



Wear resistance



Soil resistance



Wear warranties



Dimensional stability



Long life-span



Easy to transport



Non-moid





UNIQUE,
SO JOYFUL